

Brandsafe

Anti-Topple Barrier

The **Anti Topple Barrier** provides high level protection designed to prevent pallets, totes and lightweight goods from falling from elevated storage areas into walkways or vehicle routes. Standing at 2.8 metres, it offers significantly greater coverage than low level barrier systems, enhancing operational safety in busy warehouse environments. Manufactured with a hybrid HDPE and mild steel construction, the barrier combines energy absorption with structural strength for long term durability.




Features and Benefits

- Manufactured from a flexible High density polyethylene (HDPE) rails with mild steel uprights.
- Deflects under impact without damaging.
- Minimal floor damage when impact occurs, saving maintenance costs long term.
- Double bumper - single bumpers also available.
- Quick and easy installation - all fixings provided.
- Materials are non-toxic and fully recyclable.
- Suitable for use in food production facilities and freezer environments.
- High visibility colour clearly gives safe working boundaries for MHE drivers.

Applications

Brandsafe® The Anti-Topple Barrier is designed for high level storage zones where stacked pallets, totes or lightweight loads risk becoming unstable. It provides a strong vertical safety line for areas exposed to air movement, frequent stock rotation or busy forklift activity. Ideal for racking ends, mezzanine edges and bulk storage lanes, the system helps prevent items from toppling into pedestrian routes or vehicle aisles. Suitable for warehouses, manufacturing sites and distribution centres looking to enhance safety, reduce incidents and maintain compliant, well organised operations.

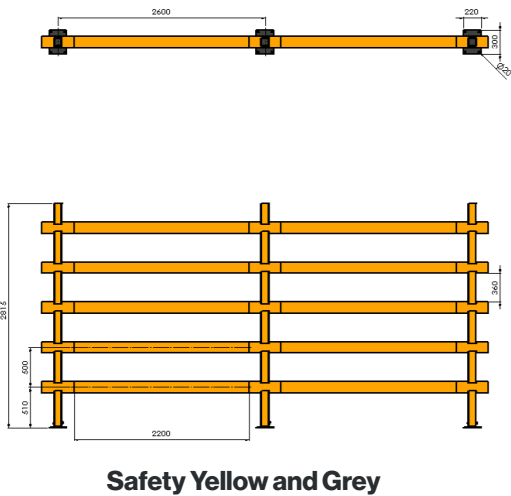

Safety Yellow and Grey

Material	High density polyethylene (HDPE) and mild steel uprights
Properties	Fully recyclable and non-toxic
Temperature range	Use in ambient, chilled and freezer environments
Height	2,800 mm
Width	220 x 300 mm (footplate)
Length	Variable, dependent on site layout
Colour options	Safety Yellow and Grey
Floor anchors	M16 x 150 mm throughbolt

Please note: For barrier runs of 3 metres or more, a centre post will be incorporated to ensure maximum protection and structural integrity.