

Brandsafe

HGV Dock Wheel Guides


An innovative approach to the traditional need to guide HGVs onto raised level loading docks. Designed to eliminate clashing between HGV wheel rims (which are expensive to repair) and guides. Taking the form of a funnel to position the HGV in the correct location.




Features and Benefits

- The HGV wheel guides are hot dip galvanized with vibrant yellow nose cones for visibility.
- Leading ends fitted with diamond grade yellow reflectors.
- Options: Straight or cranked
Cast-in specification
Yellow powder-coat finish
Extended length units
- Low level double deckers - 2000 mm long, 150 mm high.
- High level artic trailers - 2000 mm long, 200 mm high.
- Or custom fabricated to your site specific requirements.
- Welded end caps.


**Bolt-down straight, galvanised
(2000 mm x 150 mm high)**

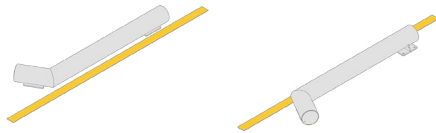


**Bolt-down straight, galvanised
(2000 mm x 200 mm high)**

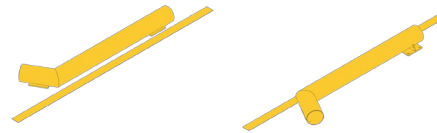

**Bolt-down cranked, galvanised
(2000 mm x 150 mm high)**

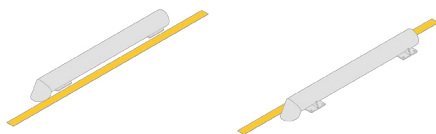

**Bolt-down cranked, galvanised
(2000 mm x 200 mm high)**

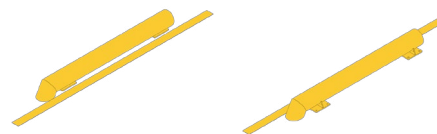

Material	Circular hollow section steel
Length	2000 mm long
Height	150 mm or 200 mm
Width	Typical internal width for setting out 2600 mm
Options	Straight or cranked
Fixing anchors	Bolt-down to suitable concrete slab with M16 x 150 mm floor anchors (4 per)
Colour options	Hot dip galvanised to BS EN ISO 1461
Reflectors	Diamond grade yellow