IWS Brandsafe
The Impact Safety Experts

Product Specification

# Brandsafe

Wheel Stops
Domestic Vehicles

These **wheel stops** ensure the end user adopts a reverse parking policy only. At 80 mm high (rather than the traditional 100 mm high), you will mitigate the risk of clash with lowered suspension, low bumpers/skirting and or mud flaps of all vehicles.



## Features and Benefits

- Parking bay car wheel stops that cater for all commercial vehicles including: double deckers, combination vehicles and coaches.
- Designed to eradicate bending and splitting associated with hollow rubber wheel stops.
- Painted high-visibility strip for improved visibility to pedestrians and drivers (black variation only).
- 900 mm long, 200 mm wide x 80 mm high.
- Manufactured from recycled materials.
- Fixings provided suitable for concrete or tarmac substrates.
- Available in two colours - black or yellow.

# Brandsafe
The Impact Safety Experts

# Product Specification



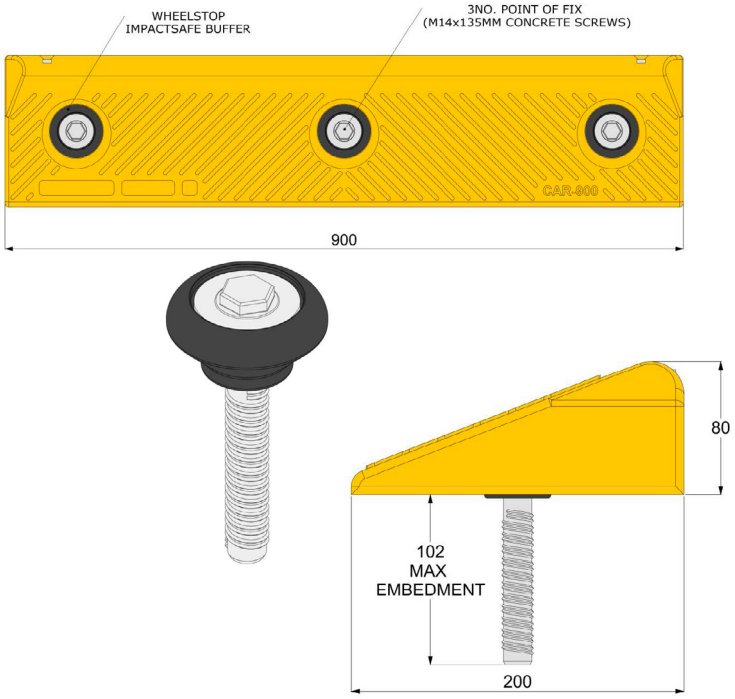


| | |
|---|---|
| **Material** | Contains recycled materials |
| **Length** | 900 mm long |
| **Width** | 200 mm |
| **Height** | 80 mm |
| **Fixing anchors** | 3No. M14 x 135 mm concrete screws |
| **Fixture hole diameter** | 18 mm (ImpactSAFE buffer plug) |
| **Drill diameter** | 14 mm concrete, 13 mm tarmac |
| **Drill depth** | 105 mm |
| **Colour options** | Black (with a painted yellow strip) or yellow |

Brandsafe
The Impact Safety Experts

Brandsafe
Unit 4 IO Centre,
Fingle Drive, Stonebridge,
Milton Keynes,
MK13 0AT

+44 (0)1525 850222

sales@brandsafeprotection.com

brandsafeprotection.com