

Brandsafe


Armco 760 Safety Barrier

760 Armco safety barriers are the ideal solution for the protection of industrial building walls, perimeters and any vulnerable equipment. The 760 mm height of this Armco barrier is the current recommended design standard for commercial vehicles. These Armco barriers can be installed swiftly onsite and will provide long-term protection due to their corrosion-resistant construction.



Features and Benefits

- 760 mm high Armco barrier to suit commercial vehicles.
- Protection for industrial buildings, HGV service yards and forklift truck routes.
- Quick to install on-site with minimal disruption.
- Can be supplied with a selection of polymer safety end and corner options.
- We recommend 1.6 M post centres for high impact areas and 3.2 M post centres for low impact areas.
- Should be fixed with M16/M20 thru bolts or a M16 chemical resin/stud fix.

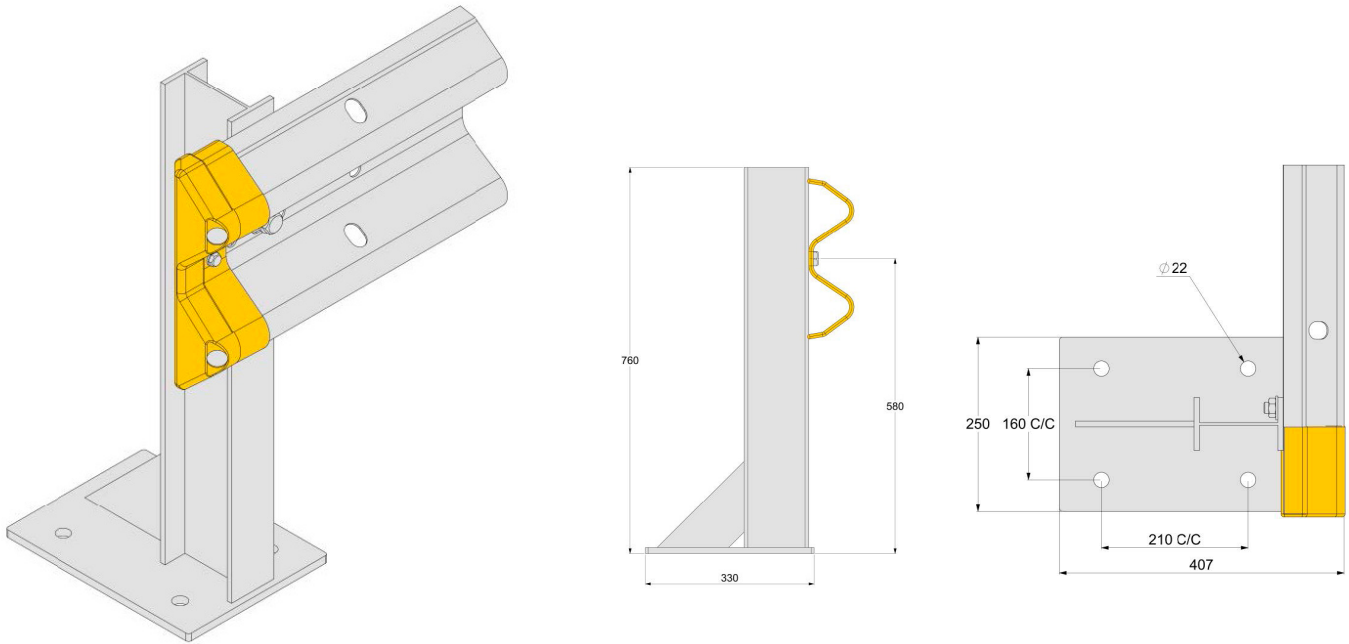

Material	Mild steel
Height	760 mm / 595 mm to centre of barrier
Fixing holes	4 per baseplate
Colour options	Hot dip galvanised to BS ENISO 1461
Safety reflectors	Diamond grade to all accessories
Base plate	Type B - 330 mm x 250 mm x 12 mm thick
Edge spacing	Conforms to 100 mm minimum
Footprint depth	409 mm
Centre spacing	160 mm x 210 mm (conforms to minimum of 100 mm)
Floor anchors	M16 x 150 mm galvanised thrubolts